

// Application

These are cables with low dielectric losses used in energy networks with sudden load changes. Laid in residential or industrial areas, underground or in ducts. If the cable gets water inside due to mechanical damage, swellable tapes prevent the movement of the water inside the cable.

// Construction

1. Stranded copper conductor
2. Inner semi-conductive layer
3. XLPE insulation.
4. Outer semi-conductive layer
5. Semi-conductive swellable tape.
6. Copper wire screen.
7. Swellable tape.
8. PE outer jacket.

// Cable Summary

Max. operating temperature	: 90°C
Max. short circuit temperature	: 250 °C
Rated voltage	: 12/20 kV or 12.7/22 kV
Min. bending radius	: 15 x D



D = Cable outer diameter

// Standards

IEC 60502 | BS 7870 | VDE 0276

// Code


N2XS(F)2Y | CU/XLPE/ILWCWS/W/PE

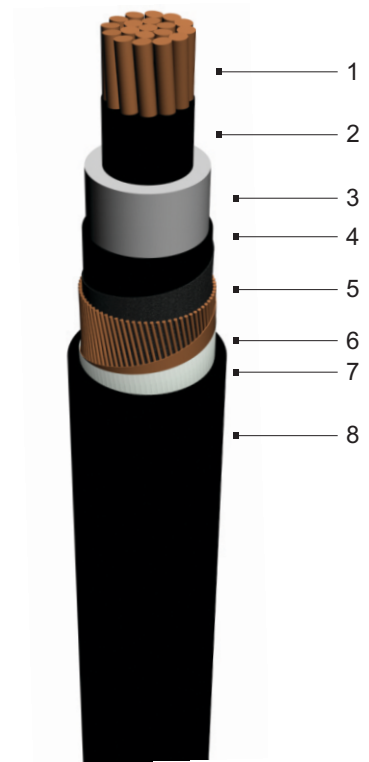

Electrical Properties									Dimensions & Weights			
DC Conductor Resistance @ 20 °C	DC Conductor Resistance @ 90 °C	Operation Inductance (approx.)		Operation Capacitance (approx.)	Current Carrying Capacity				Nominal Cross Section	Overall Dia. (approx.)	Net Weight (approx.)	Delivery Length
		mH/km _∞	mH/km _∞		μF/km	in Ground @ 20 °C _∞	in Duct _∞ @ 20 °C	in Air _∞ @ 30 °C				
ohm/km	mH/km	mH/km _∞	mH/km _∞	μF/km					mm ²	mm	kg/km	m
0.7270	0.9306	0.702	0.456	0.143	-	-	-	-	1x025/16	29.0	800	1000
0.5240	0.6707	0.676	0.436	0.157	213	189	233	199	1x035/16	30.0	900	1000
0.3870	0.4954	0.650	0.416	0.174	250	223	279	238	1x050/16	31.0	1100	1000
0.0268	0.3430	0.619	0.394	0.197	304	273	347	296	1x070/16	33.0	1300	1000
0.1930	0.2470	0.595	0.377	0.218	361	325	420	358	1x095/16	34.5	1600	1000
0.1530	0.1958	0.576	0.365	0.238	407	368	483	412	1x120/16	36.5	1850	1000
0.1240	0.1587	0.559	0.353	0.258	445	410	540	466	1x150/25	38.0	2250	1000
0.0991	0.1268	0.543	0.343	0.278	498	463	614	534	1x185/25	40.0	2650	1000
0.0754	0.0965	0.523	0.330	0.308	569	534	718	627	1x240/25	42.5	3200	1000
0.0601	0.0769	0.506	0.321	0.336	633	601	813	715	1x300/25	44.5	3800	1000
0.0470	0.0602	0.485	0.309	0.377	689	674	904	819	1x400/35	48.0	4900	1000
0.0366	0.0468	0.469	0.300	0.413	756	750	1011	927	1x500/35	51.0	5900	500
0.0283	0.0362	0.452	0.292	0.455	842	836	1128	1041	1x630/35	55.0	7150	500



Laying / Installation method:

Linear | 
 Triangular | 